



 **KEYLINE®**

RS 206



KEYLINE®

RS 206

NEW EFFICIENCY IN CUTTING MORTICE KEYS

The RS206 is the ultimate product released by the key engineers at KeyLine. RS206 offers greater efficiency, durability and comfort for the professional cutting of mortice, double bit, bullet and side warded keys.



Cutter guard for safety while operating



Transparent cover for side and bullet warded cutter



EASE OF USE

The special key head holders allow a secure and fast positioning of the keys in the clamps.



FLEXIBILITY

The turret holding the key clamps can be located in two positions so that the two cutters can reproduce all the variety of cuts on the key bit (lever cuts, bullet and side warded).



SAFETY

Both cutters are covered by protective shields preventing accidental contacts when not in use; the second cutter is fully protected by a transparent cover when not in use.



ACCURACY

The horizontal carriage is working in dual planes with linear guides providing smooth and accurate movements; an additional damper is designed to allow a better control of the radial movement and rest positions of the carriage.



QUALITY

The vertical carriage is developed to provide four modes of operation :

- 1) totally free movement in order to be synchronized with the horizontal carriage creating the radius finish on the lever cuts;
- 2) limited run movement to be used while duplicating the side warded on the bit;
- 3) fixed position locating the flat steel keys in the centre axis of the cutter;
- 4) locked position set at operator's choice fitting to various applications.




STRENGTH

The structure and the high quality components of the RS206 key cutting machine are a guarantee of superb performances of wear and tear.

NEW EFFICIENCY IN CUTTING MORTICE KEYS


BULLET WARDS

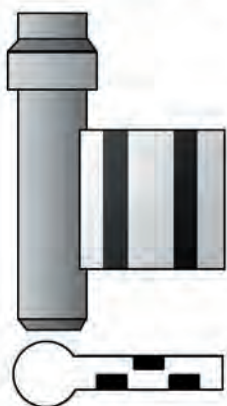


FLAT STEEL KEYS



SIDE WARDS

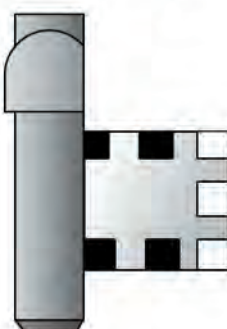

LEVER CUTS

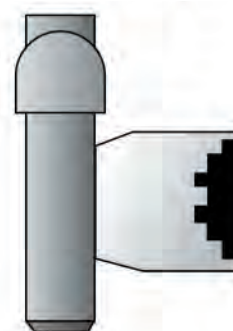

Dimensions

Length (Depth)	580 mm
Width	330 mm
Height	400 mm
Net Weight	39 Kg

Technical Features

Single Speed Motor	0.18 KW
Voltage	230V - 50Hz
First Cutter (lever cuts)	Ø 80 x 22 x 1.3 mm 500 RPM
Second Cutter (side and bullet wards)	Ø 25 x 1.25 mm 1500 RPM
Reversible jaws	(clamping round stem and flat steel keys)



KEYLINE S.p.A
Via Camillo Bianchi, 2 - P.O. BOX 251
31015 Conegliano (TV) Italy
Tel. +39 0438 202511 - Fax +39 0438 202530
e-mail: info@bianchi1770.it

www.keyline.it

